




RAUFOSS ABC™ MANIFOLD

GENERIC

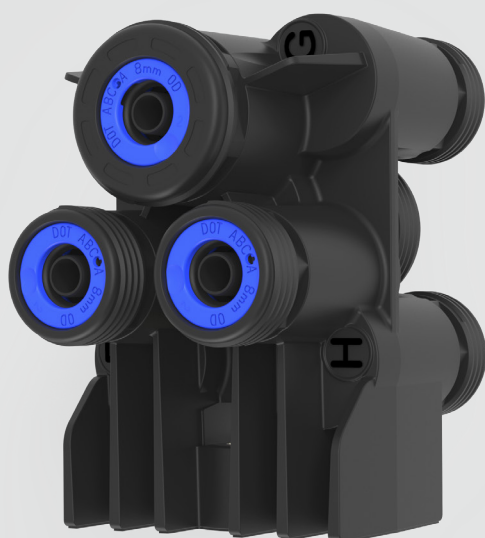

AT A GLANCE

- > OPERATION TEMPERATURE -40°C TO +100°
- > OPERATION PRESSURE ≤12,5BAR
- > FULLY ABC™ COMPATIBILITY
- > POKA-YOKE BASED CONNECTION
- > FAST ASSEMBLY AND DISASSEMBLY

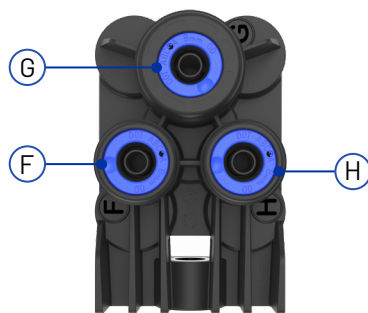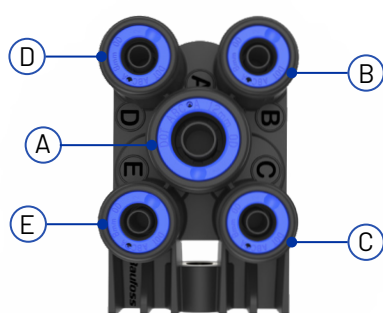


PART NO.	A	B	C	D	E	F	G	H	CROSS REFERENCE
99000112	8x1	6x1	6x1	6x1	6x1	6x1	8x1	6x1	58932-7N120
99000261	8x1	6x1	8x1(90°)	6x1	8x1	6x1	12x1,5	8x1	RC462A110AA
99000208	8x1	8x1	8x1	8x1	plug	8x1	8x1	8x1	612080011, LS6001
99000207	8x1	8x1	8x1	8x1	8x1	8x1	6x1	8x1	61208001, LS6000/2
99000099	12x1,5	8x1	8x1	8x1	8x1	8x1	8x1	8x1	6957
99000163	3/8"	1/4"	1/4"	1/4"	1/4"	1/4"	3/8"	1/4"	58933-7X720





PRODUCT FIXATION

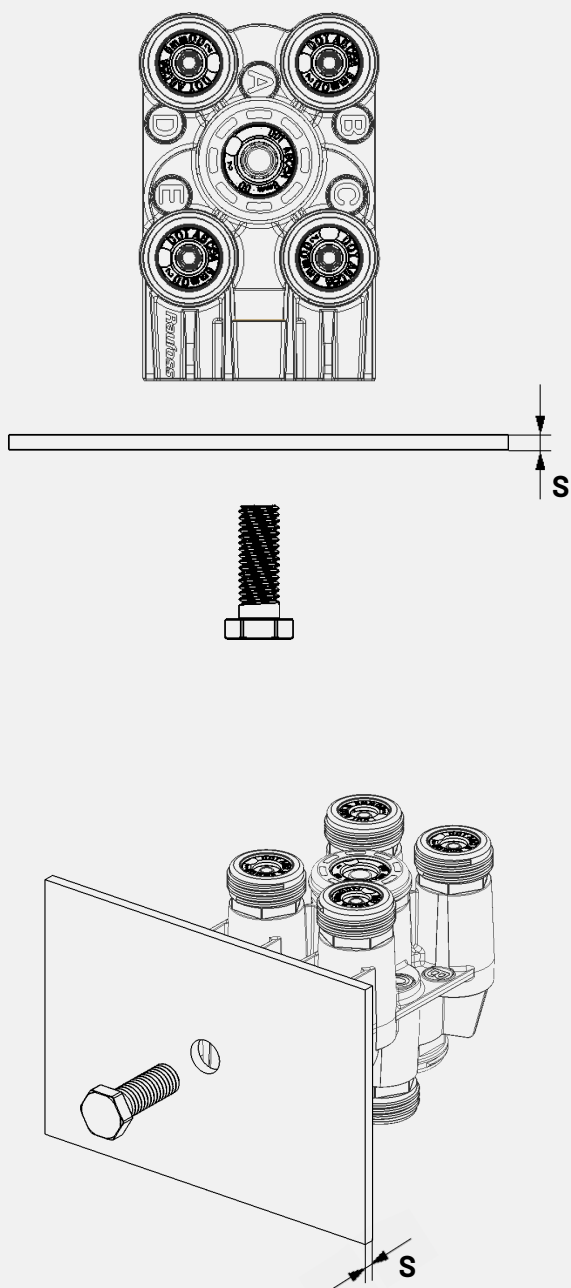

FIXATION BOLT*

TYPE: **HEXAGON BOLT (M8X1,25)**

LENGTH: **MIN. S + 8 MM, MAX. S + 12 MM**

TIGHTENING TORQUE: **17.5 NM $\pm$ 2.5 NM**

BORE IN SHEET METAL: **Ø9 MM (TOLERANCE: -0 / +0.22 MM)**

* KONGSBERG AUTOMOTIVE DOES NOT PROVIDE THE FIXATION BOLT